

Parts List

Qty	Reference	Description
1	A	Support Frame
1	B	Wheel Axle
1	C	Reel Axle Pair #1
1	D	Reel Axle Pair #2
1	E	Reel Axle Pair #3
2	F	Wheel
1	G	Swivel Locking Caster
1	H	Hardware Kit (bag)

Safety Rules

This product was designed for certain applications only. Elecor strongly recommends that this product not be modified and/or used for any purpose other than that for which it was designed.

! CAUTION


Use care when lifting the Six Reel Wire Dispenser. Unload spools first. To prevent tip over, load and unload spools evenly side to side. Do not use as a step or ladder.

Capacity

Holds up to six 2,500' spools up to 18" in diameter.

Tools Required for Assembly

9/16-inch wrench or socket

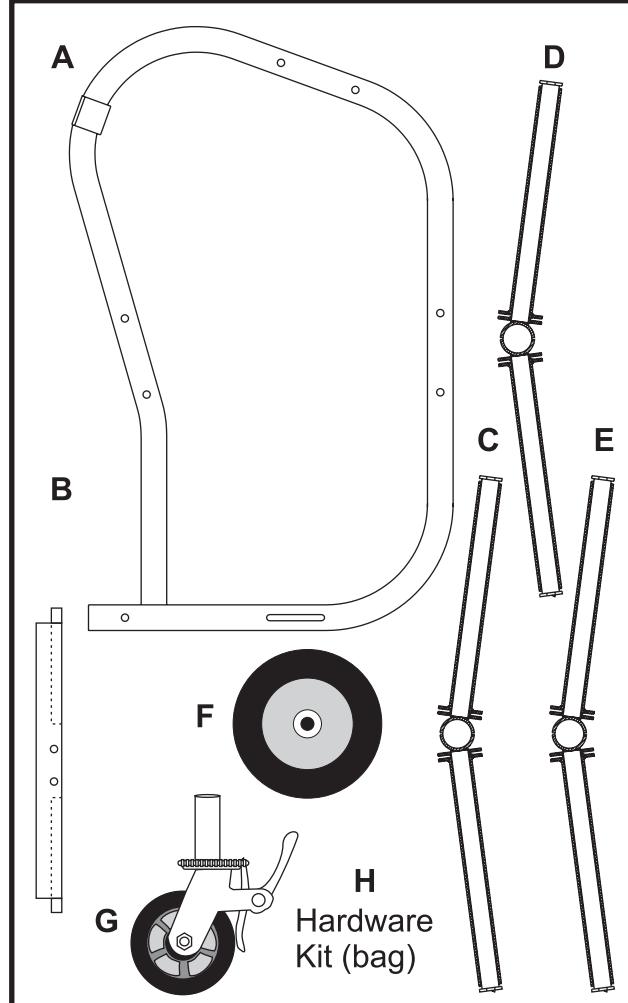

One Year Limited Warranty

Elecor will repair or replace, at its expense and at its option, any Elecor product or accessory which in normal use has proven to be defective in workmanship or material, provided that the customer notifies his supplying distributor of the alleged defect within one year from the date of delivery. If requested by Elecor customer must provide reasonable opportunity to verify the defect by inspection. Elecor will not be responsible for any asserted defect which has resulted from misuse, abuse, repair or alteration. Under no circumstances will Elecor be liable for incidental or consequential damages resulting from defective products. This warranty is Elecor's sole warranty and sets forth the customer's exclusive remedy with respect to defective products; all other warranties, expressed or implied, whether of merchantability, fitness for purpose, or otherwise, are expressly disclaimed by Elecor.

Parts Or Warranty Assistance

All Elecor products and accessories are manufactured to high quality standards. To obtain additional information regarding your Elecor product or to obtain parts, accessories or warranty assistance, please contact customer service at 1-888-466-8600 x 106.



Manufacturers of Quality
Electrical Products

MH8310 Six Reel Wire Dispenser

ELECOR LLC
13 Wood Street
P.O. Box 26125
West Haven, CT 06516
Phone: 203-937-3029
Fax: 203-937-3028

For Parts, Accessories, or
Warranty Assistance, Please
Call 1-888-466-8600 x 106



Instruction Manual

Patent Pending

Hardware

The hardware for assembling the Six Reel Wire Dispenser is enclosed in the MH8310-H Hardware Kit (bag). The kit contains the items shown at right.

Reference	Description	Qty
1	3/8-16 x 2-3/8 CARRIAGE BOLT	6
2	3/8 x 1 FLAT WASHER	8
3	3/8-16 x 1 CARRIAGE BOLT	2
4	3/8-16 NYLON-INSERT LOCK NUT HEX	2
5	3/8-16 NYLON-INSERT LOCK NUT HEX THIN	6
6	1 x 1-3/4 FLAT WASHER	4
7	2" COTTER PIN	2
8	1" COTTER PIN	1
9	3/8 x 2 CLEVIS PIN	1

Assembly Instructions

1 Insert Swivel Locking Caster (G) into Support Frame (A). Secure using 3/8 x 2" Clevis Pin (9) and 1" Cotter Pin (8) as shown in Figure 1.

2 Attach Wheel Axle (B) to Support Frame (A) using the 3/8 x 16 x 1" Carriage Bolt (3), 3/8 x 1" Flat Washer (2), and 3/8 x 16 Nylon-Insert Locknut Hex (4) as shown in Figure 1.

3 Attach the Wheels (F) to the Wheel Axle (B) using the 1 x 1-3/4" Flat Washer (6), Wheel (F) and 2" Cotter Pin (7) as shown in Figure 2. Repeat the process for the second wheel.

4 Attach the Reel Axle Pair #1 (C) to the top of the Support Frame (A) using the 3/8 x 16 x 2-3/8" Carriage Bolts (1), 3/8 x 1" Flat Washers (2) and 3/8 x 16 Nylon-Insert Locknuts Hex Thin (5) as shown in Figure 3.

5 Attach Reel Axle Pair #2 (D) to the back of Support Frame (A) using the 3/8 x 16 x 2-3/8" Carriage Bolts (1), 3/8 x 1" Flat Washers (2) and 3/8 x 16 Nylon-Insert Locknuts Hex Thin (5) as shown in Figure 4.

6 Attach Reel Axle Pair #3 (E) to the bottom of Support Frame (A) using the 3/8 x 16 x 2-3/8" Carriage Bolts (1), 3/8 x 1" Flat Washers (2) and 3/8 x 16 Nylon-Insert Locknuts Hex Thin (5) as shown in Figure 5.

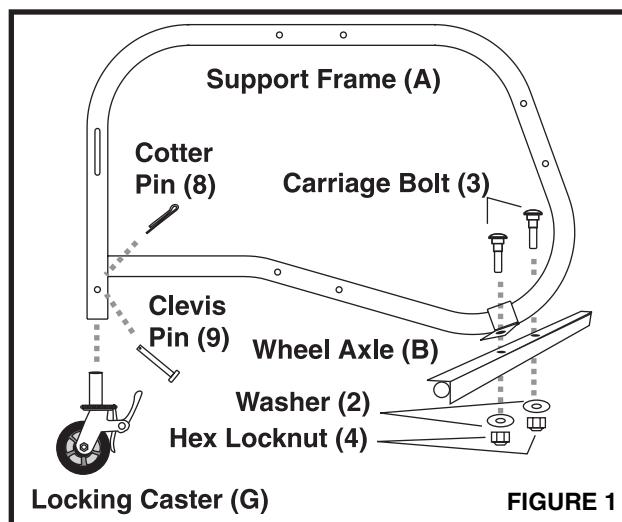


FIGURE 1

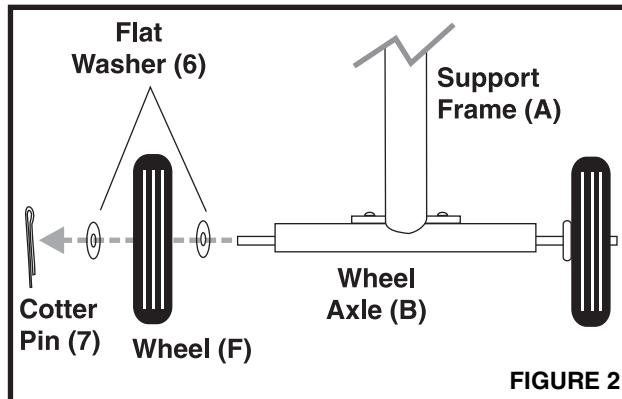


FIGURE 2

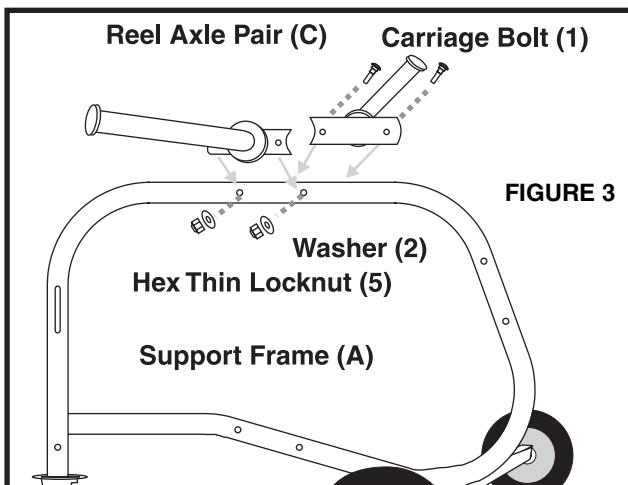


FIGURE 3

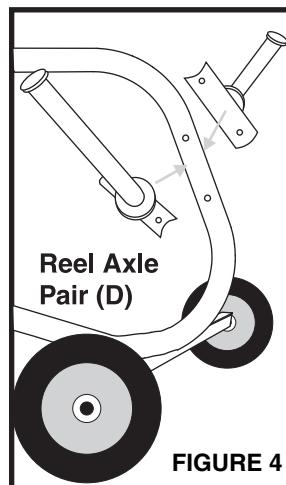


FIGURE 4

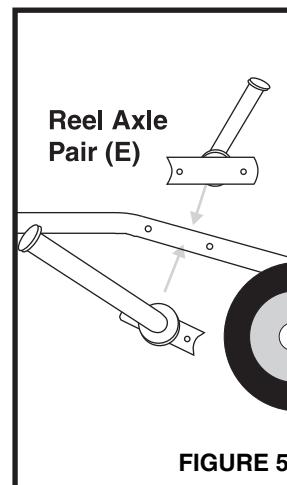


FIGURE 5